


Silver Series

# TPC-RC66HD

Product Range

## 610-630W

N-Type Rectangle Bifacial  
Double Glass

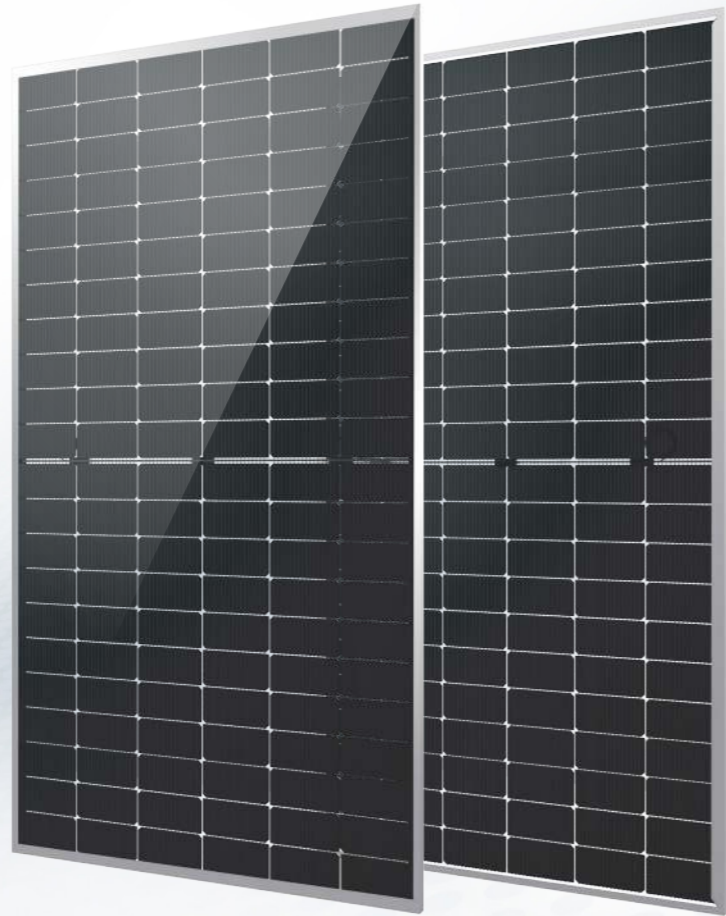

630W

Maximum Power Output

0~+5W


Positive Power Tolerance

23.32%

Maximum Efficiency

**Linear Performance Warranty**

- 15 Year Product Warranty
- 30 Year Linear Power Warranty
- <1% First year Power Degradation
- <0.4% Year 2-30 Power Degradation

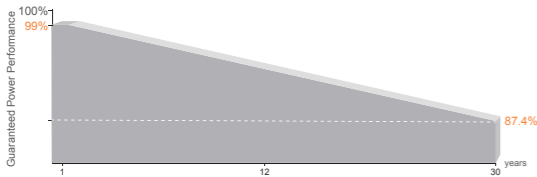

**Certifications**  
Quality Management System and Product Certification.

IEC61215(2021), IEC61730(2023), IEC61701  
IEC61215-2 (bifaciality): 2021  
ISO9001:2015: Quality Management System  
ISO14001:2015: Environment Management System  
ISO45001:2018: Occupational health and safety management systems



TPC SOLAR  
www.tpcsolar.com

**MBB Half-Cut Rectangle Solar Cell**  
182x105mm, 132 cells.

**Higher Module Conversion Efficiency**  
Higher module output up to 630W with module efficiency up to 23.32%.

**Low-Light Performance**  
Advanced glass and surface texturing allow for excellent performance in low-light environments.

**Transparent Dual-glass Design**  
Excellent fire rating, with better temperature coefficient.

**Higher Power Output**  
Module power increases 5-25% generally, bringing significantly lower LCOE and higher IRR.

### Double Glass, 66-CELL HALF-CUT SERIES

#### ELECTRICAL PARAMETERS AT STC

Module Type: TPC-RC66HD	610M	615M	620M	625M	630M
Maximum Power(Wp)	610W	615W	620W	625W	630W
Open Circuit Voltage(Voc)	48.10V	48.30V	48.50V	48.65V	48.80V
Short Circuit Current(Isc)	16.05A	16.10A	16.15A	16.20A	16.25A
Maximum Power Voltage(Vm)	39.77V	39.96V	40.15V	40.30V	40.47V
Maximum Power Current(Imp)	15.34A	15.39A	15.45A	15.51A	15.57A
Module Efficiency	22.58%	22.77%	22.95%	23.14%	23.32%
Maximum Series Fuse	30A				
Watts Positive Tolerance	0~+5W				
Number Of Diode	3				
Standard Test Conditions	1000W/M <sup>2</sup> , 25°C, AM1.5				
Maximum System Voltage	1500V/DC				
Temperature-Coefficient Isc	+0.043%/°C				
Temperature-Coefficient Voc	-0.24%/°C				
Temperature-Coefficient Pmpp	-0.30%/°C				
Operating Temperature	-40°C...+85°C				
Normal Operating Cell Temperature	45±2°C				
Load Capacity For The Cover Of The Module (Glass)	5400Pa(IEC61215)(snow)				
Load Capacity For The Front & Back Of The Module	2400Pa(IEC61215)(wind)				

#### 132HC BNPI (1000w/m<sup>2</sup> + 135w/m<sup>2</sup>)

Module Type: TPC-RC66HD	610M	615M	620M	625M	630M
Maximum Power(Wp)	671W	677W	682W	688W	694W
Open Circuit Voltage(Voc)	48.12V	48.32V	48.51V	48.67V	48.83V
Short Circuit Current(Isc)	17.66A	17.71A	17.77A	17.83A	17.89A
Maximum Power Voltage(Vm)	39.78V	39.97V	40.17V	40.33V	40.52V
Maximum Power Current(Imp)	16.87A	16.94A	16.98A	17.06A	17.13A

#### 132HC BSI (1000w/m<sup>2</sup> + 300w/m<sup>2</sup>)

Module Type: TPC-RC66HD	610M	615M	620M	625M	630M
Maximum Power(Wp)	750W	756W	763W	769W	775W
Open Circuit Voltage(Voc)	48.12V	48.32V	48.50V	48.67V	48.83V
Short Circuit Current(Isc)	19.74A	19.80A	19.86A	19.93A	20.00A
Maximum Power Voltage(Vm)	39.79V	39.98V	40.15V	40.33V	40.52V
Maximum Power Current(Imp)	18.86A	18.92A	18.99A	19.07A	19.13A


#### MECHANICAL CHARACTERISTICS

Front Cover (Material / Thickness)	low-iron tempered glass 2.0 / 2.0 mm
Cell (Quantity / Material / Dimensions)	132(6x11x2) / monocrystalline silicon, bifacial
Frame (Material / Color)	aluminum hollow-chamber frame on each side anodized aluminum alloy / silver
Junction Box (Protection Degree)	≥IP68
Cables & Plug Connectors	4mm <sup>2</sup> , 300mm in length, length can be customized
Module Dimensions (L / W / H)	2382(±2)x1134(±2)x30/35mm
Module Weight	32.5kg / 33kg
Application Class	Class A
Electrical Protection Class	Class II
Fire Safety Class	Class A


#### PACKING

Container Size	Units/Pallet (PCS)	Weight/Pallet (KG)	Pallet Measurement (mm)	Units/Container (PCS)
40HQ	36 (30mm)	1210	1140x1120x2540	720
	31 (35mm)	1060	1140x1120x2540	620

#### CURRENT-VOLTAGE CURVES:

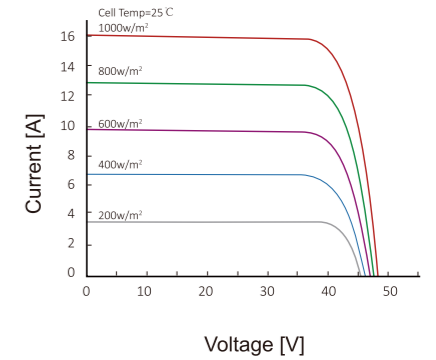

Module characteristics at constant module temperatures of 25°C and variable levels of irradiance

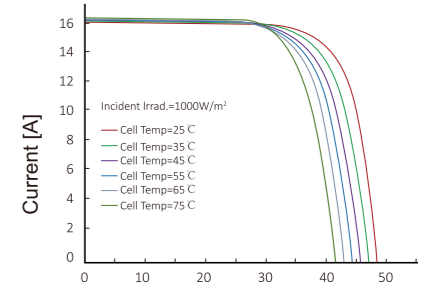

Module characteristics at variable module temperatures and constant module irradiance of 1.000 W/m<sup>2</sup>

#### MODULE DIAGRAM:

